


## Samsung DB32D/E, DM32D/E Touch Screen Overlay



Samsung Authorized Solution  
**SAMSUNG**

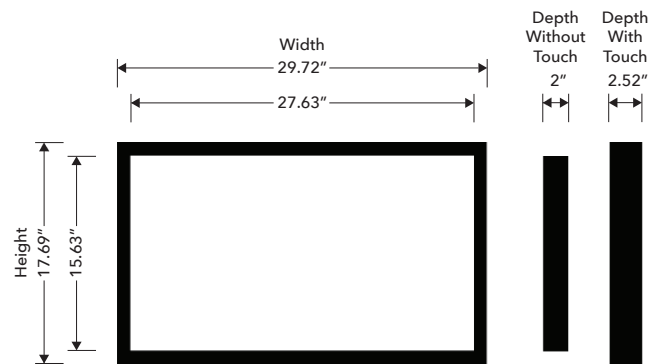

### Advanced Interactive Collaboration Solution

The TSi touch overlay is an Infrared (IR) based solution, which allows for a high accuracy interactive experience. The usage of IR technology allows for virtually any input to be detected (pen/stylus, user's fingers, palms, gloved fingers). The TSi touch overlay is a full steel chassis integrated with anti-reflective tempered cover glass, which increases durability and optical clarity, while protecting the display.



**Multi-Touch Screen**  
 True multi-touch support with up to six simultaneous touch points for all major operating systems



**Easy Integration**  
 Unrivaled simplicity makes installation easier and faster



**Ultra-Fast Response Time**  
 Allows for split second reactions between touch point and screen



**HID Compliant**  
 Maximum compatibility with numerous operating systems, plug-and-play



**Superior Design**  
 Full steel chassis combined with anti-reflective tempered glass provides additional protection to the LCD panel



**Customizable**  
 Custom colors and silk screening available

### Specifications

Display Compatible	DB32D/E, DM32D/E, DC32E
Part Number	TSI-D32-06IDOARB
Protective Glass	1/8" Anti-Reflective Tempered Glass
Frame Material	Black Powder Coat Seal
Touch Technology	IR
Touch Points	6 Point (10 Point Optional)
Response Time	6 - 16ms
Touch Accuracy	+/- 2mm (Over 99% Area)
Interface	Type A USB/M
Communication	USB 2.0
Remote Control Receiver	Extender Needed
Receiver Extender	BN39-01899A
Power Supply Mode	USB
Width/Height/Depth Including Monitor	29.72" x 17.69" x 2.52"
Weight (Without Monitor)	13.4 lbs
Boxed Weight	15.43 lbs
Boxed Dimensions	32.1" x 21.1" x 7.7"
OS Support	Windows, Google Chrome, Android, Mac, Linux